




“my
Reference,”

CREATION 55

Gerflor[®]
theflooringgroup

CREATION 55



	CREATION 55	CREATION 55 CLIC	CREATION 55 LOOSELAY	SKIRTINGS DESIGN MATCHING
AMADOR	■	■	■	■
ARENA	■	■	■	■
BALLERINA	■	■	■	■
CARMEL	■	■	■	■
HONEY OAK	■	■	■	■
LONG BOARD	■	■	■	■
MALUA BAY	■	■	■	■
NORVEGIAN STONE	■	■	■	■
PARKER STATION	■	■	■	■
RANCH	■	■	■	■
SWISS OAK GOLDEN	■	■	■	■
SWISS OAK PERLE	■	■	■	■
TWIST	■	■	■	■
AMARANTE	■	■	■	■
ASPEN	■	■	■	■
BLOOM GREY	■	■	■	■
BLOOM TAUPE	■	■	■	■
BLOOM UNI GREY	■	■	■	■
BLOOM UNI TAUPE	■	■	■	■
BOSTONIAN OAK	■	■	■	■
BOSTONIAN OAK BEIGE	■	■	■	■
BOSTONIAN OAK GREY	■	■	■	■
BOSTONIAN OAK HONEY	■	■	■	■
BROWNIE	■	■	■	■
BUFFALO	■	■	■	■
CAMBRIDGE	■	■	■	■
CARRARE	■	■	■	■
CEDAR BROWN	■	■	■	■
CEDAR PURE	■	■	■	■
DURANGO TAUPE	■	■	■	■
ERAMOSIA BEIGE	■	■	■	■
MICHIGAN	■	■	■	■
OXFORD	■	■	■	■
PAINT WOOD TAUPE	■	■	■	■
QUARTET	■	■	■	■
QUARTET FAUVE	■	■	■	■
REGGIA IVORY	■	■	■	■
RIVERSIDE	■	■	■	■
RUST CORTEN	■	■	■	■
RUSTIC OAK	■	■	■	■
SILVER CITY	■	■	■	■
STACATTO	■	■	■	■
STRIPE OAK HONEY	■	■	■	■
STRIPE OAK ICE	■	■	■	■
SWISS OAK BEIGE	■	■	■	■
SWISS OAK CASHMERE	■	■	■	■
SWISS OAK SMOKED	■	■	■	■
WHITE LIME	■	■	■	■
PONTO CRUZ CITY	■	■	■	■
PONTO CRUZ NAVY	■	■	■	■
CHEVRON BUCKWHEAT	■	■	■	■
CHEVRON HURRICANE	■	■	■	■
CHEVRON MOKA	■	■	■	■
MANSFIELD LIGHT	■	■	■	■
MANSFIELD NATURAL	■	■	■	■
NORTHWOOD MACHIAATTO	■	■	■	■
NORTHWOOD MOKACCINO	■	■	■	■
QUARTET HONEY	■	■	■	■
REGGIA TAUPE	■	■	■	■
ROYAL OAK BLOND	■	■	■	■
ROYAL OAK COFFEE	■	■	■	■
RUST METAL	■	■	■	■
VINTAGE OAK	■	■	■	■

■ : Available

LVR on gerflor.com

CREATION 55 CLIC



5X MORE RESISTANT

30% FASTER


CREATION 55 LOOSELAY



CREATION 55



THE BEST CLIC PRODUCT, EVER!

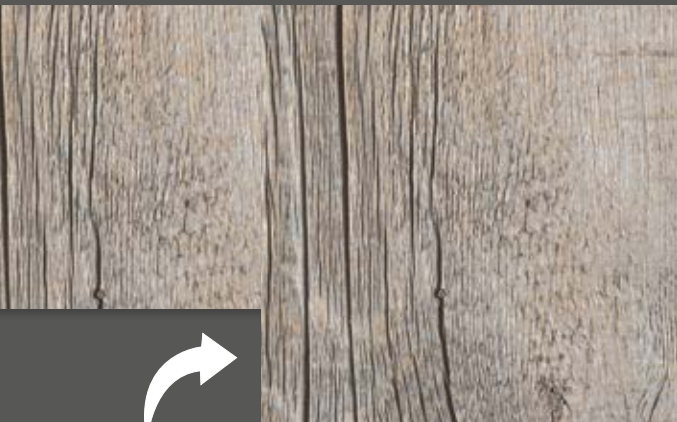

PATENTED



VISUALIZE YOUR REFERENCE



interiordesigner.gerflor.com

DESIGN SHADE VARIATION




Light



Medium



High

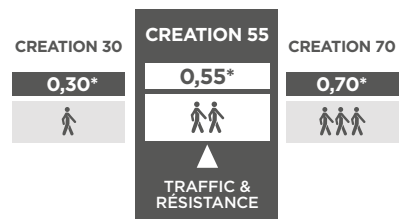

*Wear layer (mm)

PACKAGING

Format (mm)	m ² /box	m ² /pallet
CREATION 55		
152 x 762	3.82	214.04
184 x 1219	3.36	215.32
184 x 1219*	3.14	213.53
230 x 1500	3.11	214.25
457 x 914	3.76	218.04
610 x 610	3.35	187.54
CREATION 55 CLIC		
214 x 1239	1.86	106
242 x 1461	2.12	101.8
391 x 729	1.71	102.6
CREATION 55 LOOSELAY		
229 x 1220	2.23	124.88
500 x 500	2	128

*CHEVRON design only



More details on gerflor.com

CREATION 55
samples inside

For **CREATION 55 CLIC**,
and **CREATION 55 LOOSELAY**,
please order samples.

Non-contractual imagery

CREATION 55 CLIC



PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE




Natural look

CRISTAL WEAR LAYER



High definition design & color

STRUCTURED EMOSS & BEVEL



Ultra realistic surface

2M PATTERN DESIGN

Wide variety of planks or tiles

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE




Noise absorption



Soft underfoot

2 RIGID CORE



The best stability /
Fiber glass inside



No adhesive




Renovation ceramic
4 mm joint

CLIC REVOLUTION 100% VERTICAL



30% Faster




Durable clic
system



Heavy load
resistance



Waterproof joints



Easy to change
a plank



100% REACH
Phthalate free
(except recycled content)



100% RECYCLABLE
55% recycled content



**TVOC emissions below
detection level**
(TVOC < 10ug after 28 days)
No formaldehyde

For more information please refer to Gerflor's installation guidelines

30% FASTER



“With Clic Revolution, we lay out the planks, edge over edge, and we install it. It’s so simple, even when it comes to fit angles!”

Steve - **Installer**

5X MORE RESISTANT

Heavy load resistance



BREAK
120 000
CYCLES

**5X
MORE
RESISTANT!**

BREAK
25 000
CYCLES

**CLIC
REVOLUTION**

COMPETITORS




Castor Chair Test

Durable clic system



5X MORE RESISTANT!

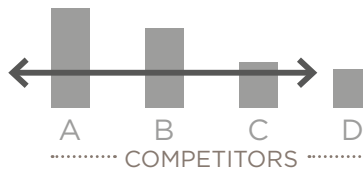

**CLIC
REVOLUTION**

COMPETITORS



Locking Strength Test



UNDERLAY

GERFLOR ACOUSTIQUE / 15 dB

More details on gerflor.com



Format: 1 m x 15 lm



UNDERLAY

GERFLOR SILENCE PLUS / 19 dB


More details on gerflor.com



Format: 1.18 m x 8.5 lm

SKIRTINGS

DESIGN MATCHING

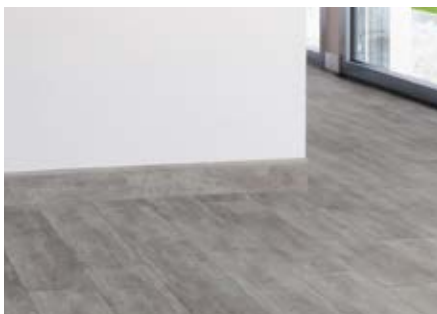

ENTRANCE MAT





ROMUS TOOLS


Anti-bounce mallet
Fitter Knife - LVT Roller



CREATION 55 LOOSELAY


500 x 500 mm


229 x 1220 mm



PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE



Natural look

CRISTAL WEAR LAYER




High definition design & color

STRUCTURED EMOSS



Ultra realistic surface

MIX&MATCH DESIGNS



Easy mix&match of designs & formats

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE




Noise absorption



Soft underfoot

2 RIGID CORE



The best stability
Fiber glass inside




Renovation ceramic
4 mm joint



No adhesive up
to 30 m²

GRIP-WAVE BACKLAYER

ANTI-SKID BACKING



Super strong suction
to the subfloor

Air circulation:
better acoustic

Humidity circulation:
moisture resistance



Easily removable:
renovation

100% REACH
Phthalate free
(except recycled content)



100% RECYCLABLE
35% recycled content



**TVOC emissions below
detection level**
(TVOC < 10µg after 28 days)
No formaldehyde




For more information please refer to Gerflor's installation guidelines

SKIRTINGS


DESIGN MATCHING

More details on gerflor.com



Also available in white
can be painted over

CREATION 55

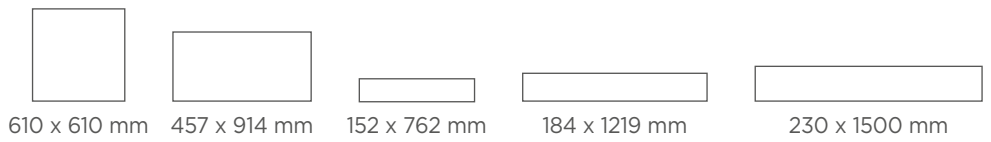


610 x 610 mm

457 x 914 mm

152 x 762 mm

184 x 1219 mm

230 x 1500 mm



PUR+ MATT



Easy maintenance

4D DESIGN

MATT SURFACE




Natural look

CRISTAL WEAR LAYER




High definition design & color

STRUCTURED EMBOSS & BEVEL



Ultra realistic surface

MIX&MATCH DESIGNS



Easy mix&match of designs & formats

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE




Noise absorption



Soft underfoot

2 RIGID CORE



The best stability
Fiber glass inside*

*Creation 55 Trend

DIAMOND BACKLAYER


BODY & STRENGTH



Easy handling

BACK EMBOSS

Better subfloor
adhesion



Easy positioning

100% REACH
Phthalate free
(except recycled content)



100% RECYCLABLE
35% recycled content



**TVOC emissions below
detection level**
(TVOC < 10ug after 28 days)
No formaldehyde



For more information please refer to Gerflor's installation guidelines



UNDERLAY
GERFLOR SMART FIX / 16 dB
More details on gerflor.com



Format: 1 m x 7,5 lm

SKIRTINGS
DESIGN MATCHING





“my
Reference,”

30 years experience

Since 1985

Manufacturer


3 LVT Factories

World Class Logistics

12 Logistics Hubs

Gerflor Design Centre

Exclusive Designs



“Serenity,,

Julia - **End User**



“Time saving,,

Mika - **Installer**



“Unique Design,,

Pierre - **Architect**



“Confidence,,

Claire - **Store Manager**



“Reliability,,

Lucas - **Distributor**

Gerflor
is our

Reference



SWISS OAK BEIGE



SWISS OAK GOLDEN



SWISS OAK CASHMERE



SWISS OAK PEARL







SWISS OAK SMOKED

Swiss Oak Collection



SWISS OAK GOLDEN 0796

 184 x 1219
230 x 1500 |  214 x 1239
242 x 1461 |  229 x 1220 



SWISS OAK BEIGE 0848

 184 x 1219
230 x 1500 |  214 x 1239
242 x 1461 | 







SWISS OAK CASHMERE 0795

 184 x 1219
230 x 1500 |  214 x 1239
242 x 1461 | 



SWISS OAK PEARL 0846

 184 x 1219
230 x 1500 |  214 x 1239
242 x 1461 |  229 x 1220 



SWISS OAK SMOKED 0847

 184 x 1219
230 x 1500 |  214 x 1239
242 x 1461 | 

Bostonian Oak Collection



BOSTONIAN OAK HONEY 0851

184 x 1219 | 214 x 1239
230 x 1500 | 242 x 1461



BOSTONIAN OAK 0871

184 x 1219 | 214 x 1239



BOSTONIAN OAK BEIGE 0853

184 x 1219 | 214 x 1239
230 x 1500 | 242 x 1461



BOSTONIAN OAK GREY 0855

184 x 1219 | 214 x 1239
230 x 1500 | 242 x 1461





BOSTONIAN OAK HONEY



BOSTONIAN OAK



BOSTONIAN OAK BEIGE



BOSTONIAN OAK GREY



RANCH



VINTAGE OAK



AMADOR



OXFORD



VINTAGE OAK 0426

184 x 1219



RANCH 0456

184 x 1219 | 230 x 1500 | 214 x 1239 | 242 x 1461 | 229 x 1220



AMADOR 0447

184 x 1219 | 214 x 1239 | 229 x 1220



OXFORD 0061

184 x 1219 | 214 x 1239



CHEVRON MOKA 0810



 184 x 1219



CHEVRON BUCKWHEAT 0811



 184 x 1219



CHEVRON HURRICANE 0809



 184 x 1219





CHEVRON MOKA



CHEVRON HURRICANE



CHEVRON BUCKWHEAT



STRIPE OAK ICE



MANSFIELD LIGHT



ARENA



STRIPE OAK ICE 0858

 184 x 1219

|  214 x 1239



MANSFIELD LIGHT 0068


 184 x 1219



ARENA 0060

 184 x 1219

|  214 x 1239

|  229 x 1220





MALUA BAY 0448

 184 x 1219 |  214 x 1239 |  229 x 1220 



WHITE LIME 0584

 184 x 1219 |  214 x 1239 



PAINT WOOD TAUPE 0856

 184 x 1219 |  214 x 1239 



MALUA BAY



WHITE LIME




PAINT WOOD TAUPE



MANDFIELD NATURAL



LONG BOARD

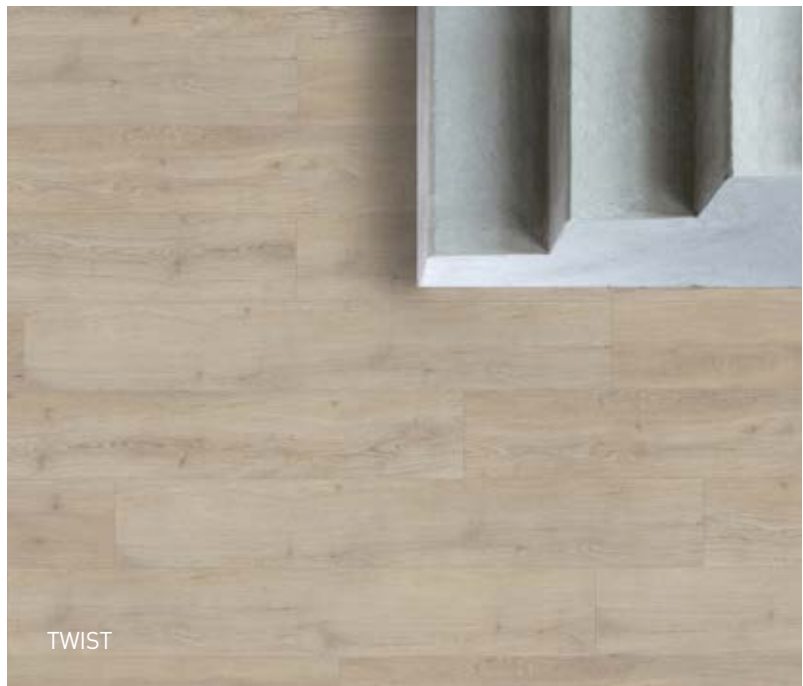

TWIST



HONEY OAK



MANSFIELD NATURAL 0069


 184 x 1219



TWIST 0504

 184 x 1219

 214 x 1239


 229 x 1220



LONG BOARD 0455

 184 x 1219

 214 x 1239


 229 x 1220



HONEY OAK 0441

 184 x 1219

 214 x 1239

 229 x 1220





CEDAR PURE 0849

 230 x 1500

 242 x 1461



CEDAR BROWN 0850

 230 x 1500

 242 x 1461





CEDAR PURE



CEDAR BROWN



CEDAR PURE



NORTHWOOD MOKACCINO



NORTHWOOD MACCHIATO



ROYAL OAK BLOND



ROYAL OAK COFFEE



NORTHWOOD MACCHIATO 0816

 184 x 1219



NORTHWOOD MOKACCINO 0817

 184 x 1219



ROYAL OAK BLOND 0812

 184 x 1219



ROYAL OAK COFFEE 0740

 184 x 1219





CAMBRIDGE 0465

 184 x 1219

|  214 x 1239




QUARTET HONEY 0870

 184 x 1219



BALLERINA 0347

 184 x 1219 / 152 x 762

|  214 x 1239

|  229 x 1220



QUARTET FAUVE 0859

 184 x 1219

|  214 x 1239





CAMBRIDGE



QUARTET HONEY



BALLERINA



QUARTET FAUVE



QUARTET



STRIPE OAK HONEY



AMARANTE



RUSTIC OAK



QUARTET 0503

184 x 121.9
152 x 762

214 x 1239



AMARANTE 0579

184 x 1219

214 x 1239



RUSTIC OAK 0445

184 x 1219

214 x 1239



STRIPE OAK HONEY 0857

184 x 1219

214 x 1239





MICHIGAN 0461

 184 x 1219 |  214 x 1239 



BROWNIE 0459

 184 x 1219 |  214 x 1239 



BUFFALO 0457

 184 x 1219 |  214 x 1239 



ASPEN 0458

 184 x 1219 |  214 x 1239 



BROWNIE



MICHIGAN



BUFFALO



ASPEN



RUST CORTEN



RUST METAL



DURANGO TAUPE



RUST CORTEN 0095

 457 x 914 |  391 x 729 




RUST METAL 0094

 457 x 914 



DURANGO TAUPE 0751

 610 x 610 |  391 x 729 

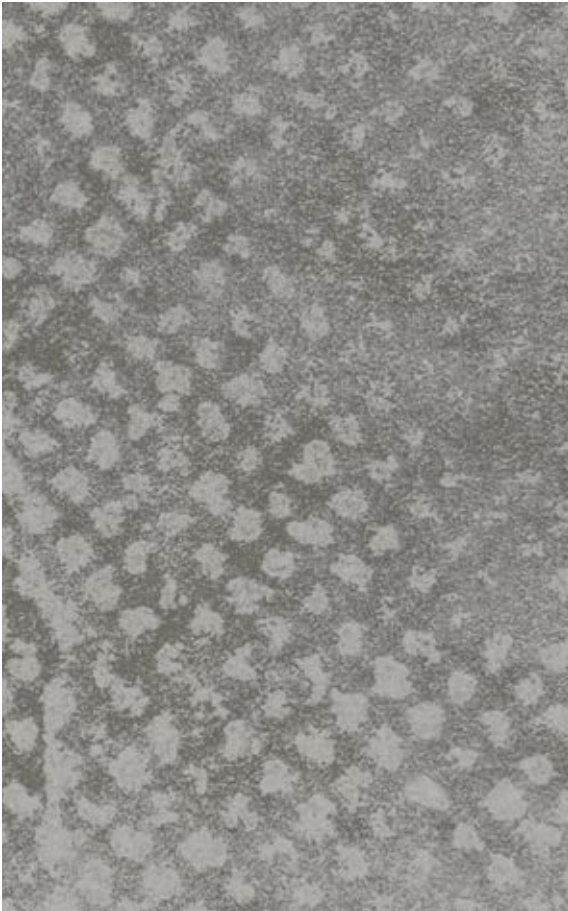

STACCATO 0476  610 x 610 |  391 x 729 







SILVER CITY 0373  610 x 610 |  391 x 729 



PARKER STATION 0374 
 610 x 610 |  391 x 729 |  500 x 500



NORVEGIAN STONE 0860 
 457 x 914 |  391 x 729 |  500 x 500



PARKER STATION



STACCATO



SILVER CITY



NORVEGIAN STONE




REGGIA TAUPE



CARMEL



RIVERSIDE

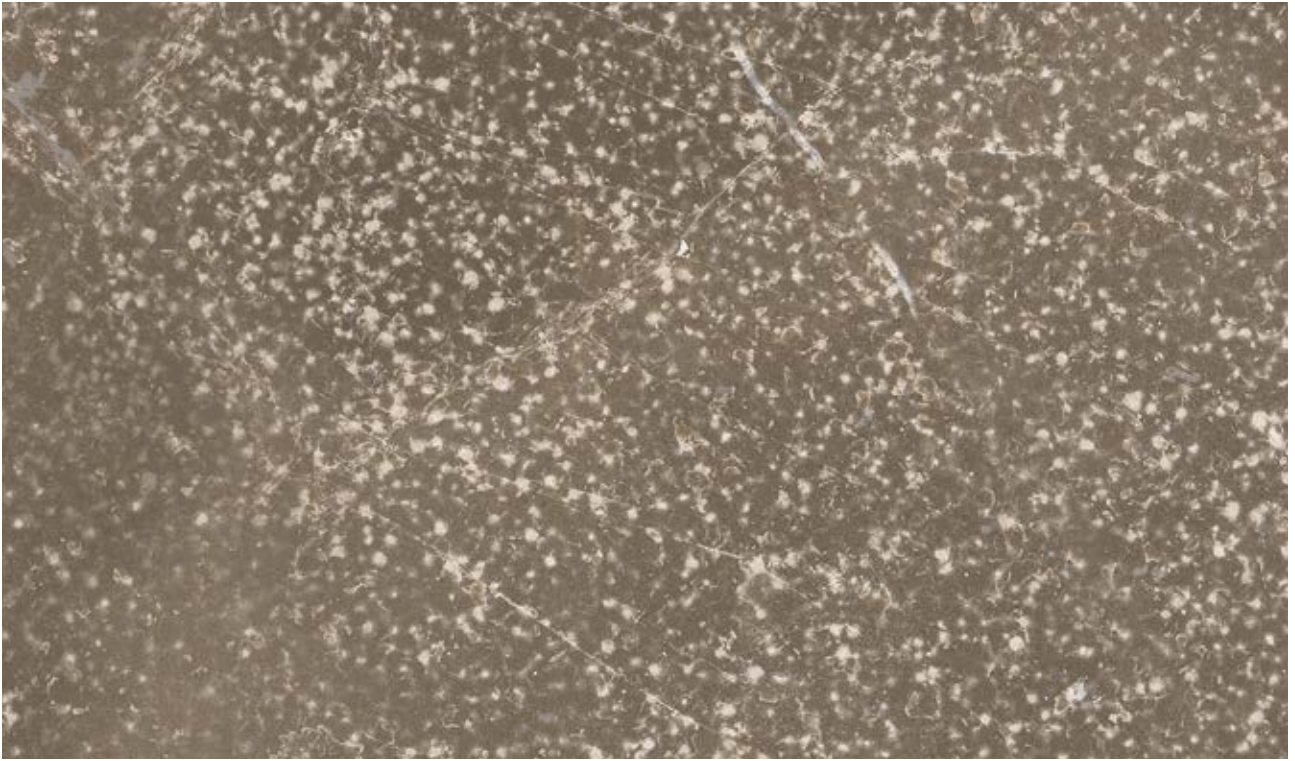


REGGIA TAUPE 0862

 457 x 914 



CARMEL 0618

 457 x 914 |  391 x 729 |  500 x 500 



RIVERSIDE 0436

 610 x 610 |  391 x 729 




PONTO CRUZ NAVY 0876



610 x 610
152 x 762



500 x 500

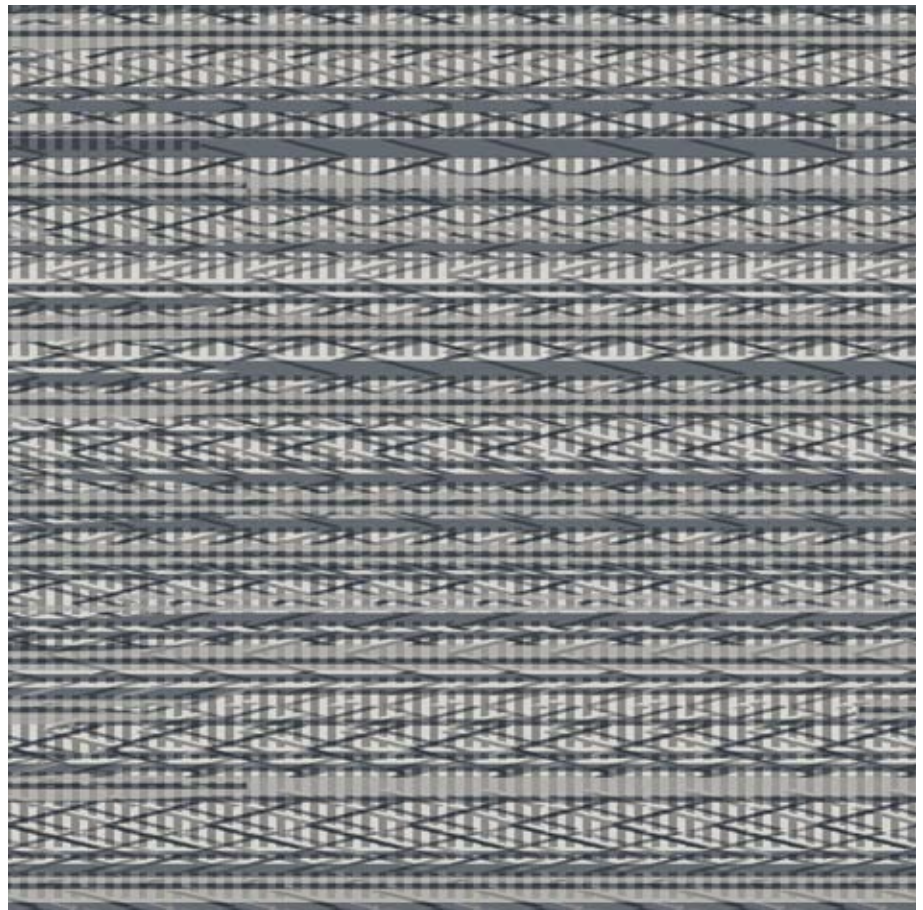

PONTO CRUZ CITY 0878



610 x 610
152 x 762



500 x 500






PONTO CRUZ NAVY



PONTO CRUZ NAVY & CITY




PONTO CRUZ CITY

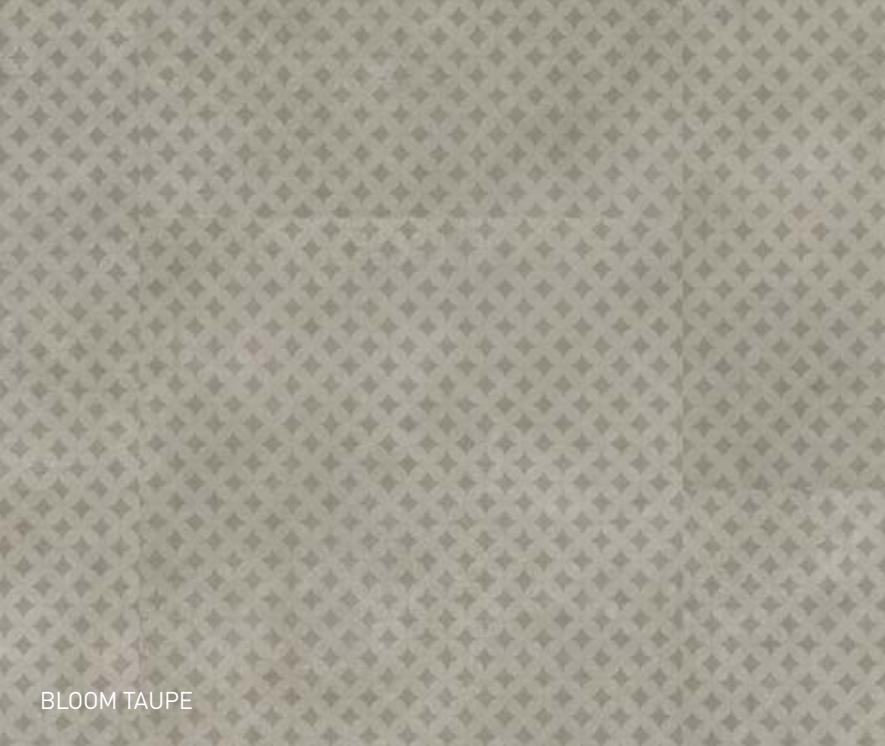

BLOOM TAUPE



BLOOM TAUPE / BLOOM UNI TAUPE

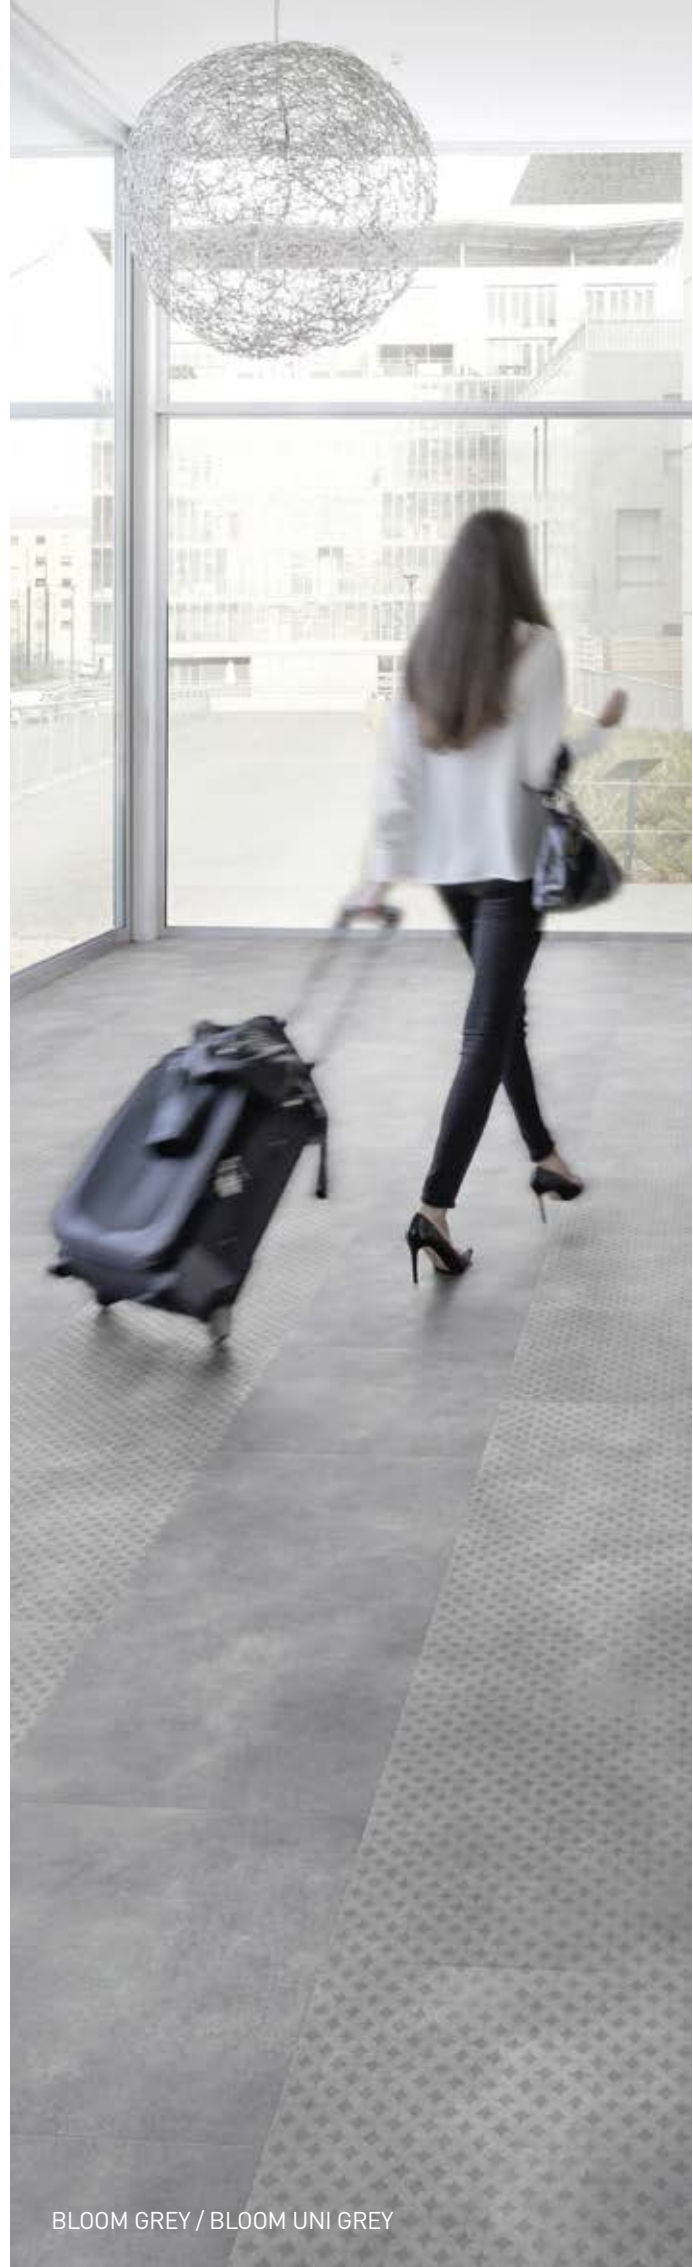

BLOOM GREY / BLOOM UNI GREY



BLOOM TAUPE 0866

610 x 610 | 391 x 729



BLOOM UNI TAUPE 0868

610 x 610 | 391 x 729



BLOOM GREY 0867

610 x 610 | 391 x 729



BLOOM UNI GREY 0869

610 x 610 | 391 x 729





CARRARE 0744

 457 x 914

|  391 x 729




REGGIA IVORY 0861

 457 x 914 |  391 x 729



ERAMOSIA BEIGE 0863

 457 x 914 |  391 x 729





CARRARE



REGGIA IVORY



ERAMOSA BEIGE

EXCLUSIVE EMBOSSES FOR ENHANCED DESIGNS
SURFACES GRAINÉES POUR UNE MATIÈRE TRÈS RÉALISTE
VERSCHIEDENE EXKLUSIVE OBERFLÄCHENPRÄGUNGEN
FÜR NOCH REALISTISCHERE DESIGNS



BRUSHED




ROYAL OAK




SAW EFFECT




NATURAL

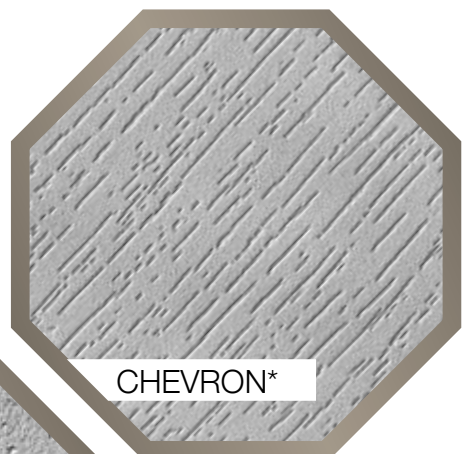

CHEVRON*

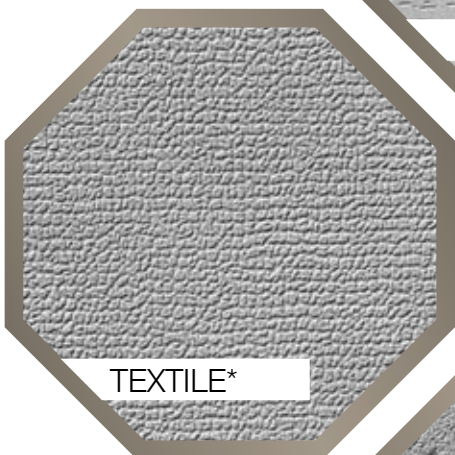


TEXTILE*

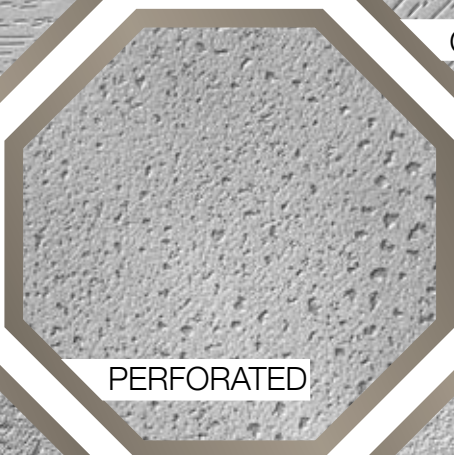




PERFORATED

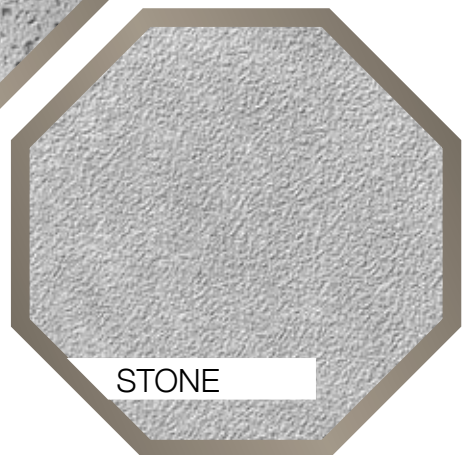

HAMMERED



STONE

COLOR DESIGN	CODE	EMBOSES / GRAINS / PRÄGUNGEN	CREATION 55 GLUE DOWN	CREATION 55 CLIC	CREATION 55 LOOSELAY
					
AMADOR	0447	SAW EFFECT	•	•	•
ARENA	0060	SAW EFFECT	•	•	•
BALLERINA	0347	NATURAL	•	•	•
CARMEL	0618	HAMMERED	•	•	•
HONEY OAK	0441	NATURAL	•	•	•
LONG BOARD	0455	BRUSHED	•	•	•
MALUA BAY	0448	BRUSHED	•	•	•
NORVEGIAN STONE	0860	HAMMERED	•	•	•
PARKER STATION	0374	HAMMERED	•	•	•
RANCH	0456	BRUSHED	•	•	•
SWISS OAK GOLDEN	0796	NATURAL	•	•	•
SWISS OAK PEARL	0846	NATURAL	•	•	•
TWIST	0504	NATURAL	•	•	•
AMARANTE	0579	BRUSHED	•	•	•
ASPEN	0458	BRUSHED	•	•	•
BLOOM GREY	0867	HAMMERED	•	•	•
BLOOM TAUPE	0866	HAMMERED	•	•	•
BLOOM UNI GREY	0869	HAMMERED	•	•	•
BLOOM UNI TAUPE	0868	HAMMERED	•	•	•
BOSTONIAN OAK	0871	NATURAL	•	•	•
BOSTONIAN OAK BEIGE	0853	NATURAL	•	•	•
BOSTONIAN OAK GREY	0855	NATURAL	•	•	•
BOSTONIAN OAK HONEY	0851	NATURAL	•	•	•
BROWNIE	0459	NATURAL	•	•	•
BUFFALO	0457	BRUSHED	•	•	•
CAMBRIDGE	0465	NATURAL	•	•	•
CARRARE	0744	STONE	•	•	•
CEDAR BROWN	0850	NATURAL	•	•	•
CEDAR PURE	0849	NATURAL	•	•	•
DURANGO TAUPE	0751	HAMMERED	•	•	•
ERAMOSIA BEIGE	0863	NATURAL	•	•	•
MICHIGAN	0461	BRUSHED	•	•	•
OXFORD	0061	BRUSHED	•	•	•
PAINT WOOD TAUPE	0856	BRUSHED	•	•	•
QUARTET	0503	NATURAL	•	•	•
QUARTET FAUVE	0859	NATURAL	•	•	•
REGGIA IVORY	0861	STONE	•	•	•
RIVERSIDE	0436	HAMMERED	•	•	•
RUST CORTEN	0095	PERFORATED	•	•	•
RUSTIC OAK	0445	BRUSHED	•	•	•
SILVER CITY	0373	HAMMERED	•	•	•
STACCATO	0476	PERFORATED	•	•	•
STRIPE OAK HONEY	0857	NATURAL	•	•	•
STRIPE OAK ICE	0858	NATURAL	•	•	•
SWISS OAK BEIGE	0848	NATURAL	•	•	•
SWISS OAK CASHMERE	0795	NATURAL	•	•	•
SWISS OAK SMOKED	0847	NATURAL	•	•	•
WHITE LIME	0584	SAW EFFECT	•	•	•
PONTO CRUZ CITY*	0878	TEXTILE	•	•	•
PONTO CRUZ NAVY*	0876	TEXTILE	•	•	•
CHEVRON BUCKWHEAT*	0811	CHEVRON	•	•	•
CHEVRON HURRICANE*	0809	CHEVRON	•	•	•
CHEVRON MOKA*	0810	CHEVRON	•	•	•
MANSFIELD LIGHT	0068	BRUSHED	•	•	•
MANSFIELD NATURAL	0069	BRUSHED	•	•	•
NORTH WOOD MACCHIATO	0816	BRUSHED	•	•	•
NORTH WOOD MOKACCINO	0817	BRUSHED	•	•	•
QUARTET HONEY	0870	NATURAL	•	•	•
REGGIA TAUPE	0862	STONE	•	•	•
ROYAL OAK BLOND	0812	ROYAL OAK	•	•	•
ROYAL OAK COFFEE	0740	ROYAL OAK	•	•	•
RUST METAL	0094	PERFORATED	•	•	•
VINTAGE OAK	0426	BRUSHED	•	•	•

•: Available / Disponible / Verfügbar



DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE	CREATION 55		CREATION 55 LOOSELAY	CREATION 55 CLIC
	DESIGN	TREND		
Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Spessore totale	EN ISO 24346 mm	2.50	4.50	5.00
	ASTM F386-02 inch	0.10	0.18	0.20
Thickness of the wearlayer / Dicke der Nuttschicht / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Espessura camada de desgaste / Spessore strato di usura	EN ISO 24340 mm	0.55	0.55	0.55
	ASTM F410-02 inch	0.02	0.02	0.02
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Peso	EN ISO 23997 g/m ²	4410	3850	8230
Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensioe	ISO 24342 mm	184x1219 / 230x1500 152x762 457x914 / 610x610	184x1219 / 230x1500 152x762 457x914 / 610x610	229x1220 500x500
	ASTM F 536 inch	7.25"x48" / 9"x59" 6"x30" / 18"x36" / 24"x24"	7.25"x48" / 9"x59" 6"x30" / 18"x36" / 24"x24"	9"x48" 19.7"x19.7"

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme / Spécification produit / Normas / Normas / Norma prodotto	-	-	EN ISO 10582	EN ISO 10582	EN ISO 10582	EN ISO 10582
	ASTM F 1700-04	-	Class III Type B	Class III Type B	-	Class III Type B
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Clasificación europea / Classificação Europeia / Europea	EN ISO 10874	Class	33 - 42	33 - 42	33 - 42	33 - 42
Classement UPEC	-	-	U3P3E2C2	U3P3E2C2	-	Pour pose dans les locaux classés U3P3E1/2C2
Certification UPEC	QB 30	n°	783/356-004.1	355-002.1	-	-
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco	EN 13 501-1	Class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static Electrical Propensity / Begehauffadung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica	EN 1815	kV	< 2	< 2	< 2	< 2
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamento húmedo / Escorregamento húmido / Scivolosità umida ¹⁾	DIN 51130/BGR 181	Class	R10	R10	R10	R10

PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wear Resistance / Verschleißverhalten / Slijtvastheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0
Wear Group / Verschleißgruppe / Groep slijtvastheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione	QB 30	group	T	T	T	T
Type Binder content / Bindemittelgehalt / Teneur en agent liant / Contenido en ligante / Conteúdo em ligante	ISO 10582	group	I	I	I	I
Dimensional stability (norm) / Maßstabilität (norm) / Maatvastheid (norm) / Stabilité dimensionnelle (norme) / Estabilidad Dimensional (Exigencia) / Estabilidade dimensional (normalização) / Stabilità dimensionale (requisito normativo)	EN ISO 23999	%	≤ 0.25	≤ 0.25	≤ 0.15	≤ 0.15
Dimensional stability (average measured value) / Maßstabilität (Durchschnittswert) / Stabilité dimensionnelle (valeur moyenne mesurée) / Maatvastheid (gemeten gemiddelde waarde) / Estabilidad Dimensional (Valor medio) / Estabilidade Dimensional (Valor medio) / Stabilità dimensionale (rilevata)	-	%	≤ 0.10	≤ 0.10	≤ 0.05	≤ 0.05
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçoamento / Impronta	EN ISO 24343-1	mm	≤ 0.10	≤ 0.10	≤ 0.10	≤ 0.10
Impact sound insulation / Trittschallverbesserungsmaß / Geluidsisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico	EN ISO 717-2	dB	4	4	7	4
Room Impact / Raumschall / Loopgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar	NF S 31074	dB	77	77	73	78
Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed [Type W]	ISO 4918	-	OK	OK	OK	OK
Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Contutividade térmica / Resistenza termica / Värmeledningsmotstånd / Varmemotstånd	EN ISO 10456	W/(m.K)	0.25	0.25	0.25	0.25
Colour Fastness / Lichtechtheit / Lichtechtheit / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce	EN 20 105 - B02	degree	> 6	> 6	> 6	> 6
Surface Treatment / Oberflächenvergütung / Oppervlaktebehandeling / Traitement de surface / Tratamiento de superficie / Tratamento de superficie / Tratamento di superficie	-	-	PUR+ Matt	PUR+ Matt	PUR+ Matt	PUR+ Matt
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestendigheid / Résistance aux produits chimiques / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici ²⁾	EN ISO 26987	-	OK	OK	OK	OK

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITE DE L'AIR INTERIEUR / MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIO AMBIENTE/QUALIDADE DO AR INTERIOR

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	µg/m ³	< 10	< 10	< 10	< 10
Certification / Zeugnis / Certification / Certificado / Certificação	-	-	-	Floorscore®	-	Floorscore®

CE MARKING / CE KENNZEICHNUNG / EG_CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA

	EN 14041	-				
--	----------	---	--	--	--	--

(1) Ramp test with oil / Schiefe Ebene / Plan incliné avec huile

(2) Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung.

CREATION, NO FORMALDEHYDE, BETTER INDOOR AIR QUALITY

COMPOSITION 100% REACH Phthalate Free (except recycled content)	INDOOR AIR QUALITY TVOC below detection level No Formaldehyde emission	RECYCLED CONTENT Glue Down: 35% Looselay: 35% Clic: 55%	RECYCLABILITY 100%	INSTALLATION Clic: Adhesive free	LCA New process: Lowest Carbon Footprint CO ₂ emissions/sqcm 10 times lower than standard process	WELLNESS Walking noise reduction: -10dB vs laminate

IMPORTANT: The information contained in this document is valid from 01/08/2019 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.